



# RA300

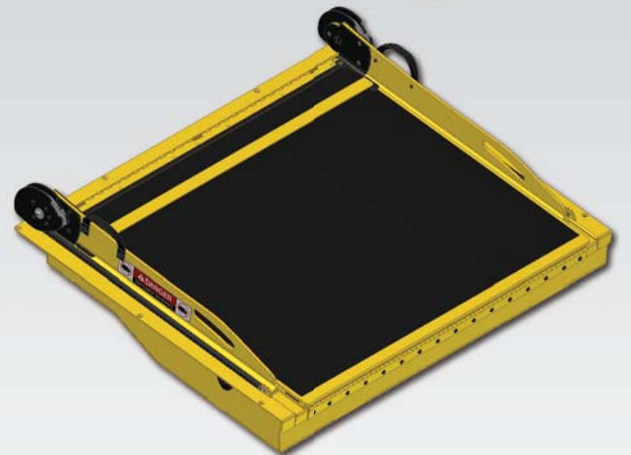

- ADA-Compliant
- Drop-In Installation
- Cost-Competitive
- Self-contained, drop-in, electrically interfaced unit
  - No external pump module
  - No dependence on vehicle hydraulics
  - No routing of hydraulic hoses
  - No pre-assembly of any kind
- "End of line" installation/quick "plug-in"
- Easy open cover for quick access to components
- Water resistant electrical connections and controls
- 12 volt pump module
- Low power consumption
- Smooth, quiet operation
- Hydraulic up / gravity drift down
- Easy service/repair

**NOW WITH  
1,000 lb  
CAPACITY**

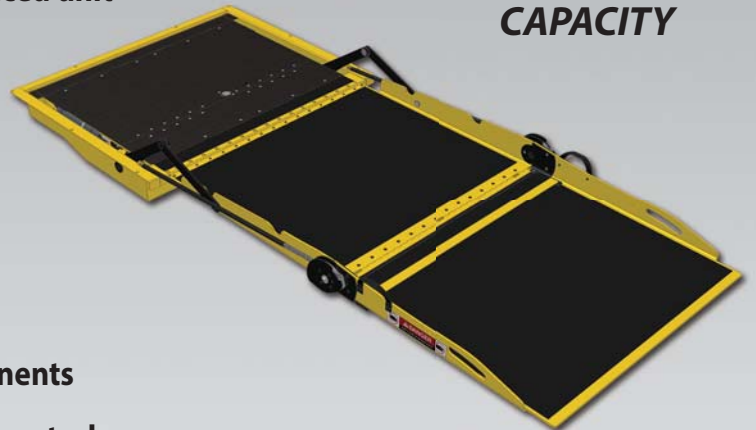

# RA300 Ramp Specifications

**Capacity:** 1,000 lb (800 lb - BF3462Y-2PA)

**Power Unit:** Hydraulic Pump Module





**Voltage:** 12 VDC

**Current:** 30 Amps (Max)

**Inputs Required:**  
 +12 Volt Supply  
 (-) Ground  
 Ramp "Out" Signal (+)  
 Ramp "In" Signal (+)  
 Interlock Signal

**Notes:** Mounting holes/brackets per application

	BF3248Y-2	BF3255Y-2	BF3455Y-2	BF3262Y-2	BF3462Y-2	BF3462Y-2PA
A	27.900"	30.370"	30.370"	33.020"	33.020"	33.020"
B	36.700"	36.700"	38.700"	36.700"	38.700"	38.700"
C	32.125"	32.125"	34.125"	32.125"	34.125"	34.125"
D	33.800"	33.800"	35.800"	33.800"	35.800"	35.800"
E	3.660"	3.660"	3.660"	3.660"	3.660"	3.660"
F	26.600"	29.070"	29.070"	31.720"	31.720"	31.720"
G	9.140"	9.140"	9.140"	9.140"	9.140"	9.140"
H	36.700"	36.700"	38.700"	36.700"	38.700"	38.700"
J	80.060"	87.480"	87.480"	94.920"	94.920"	94.920"
K	32.125"	32.125"	34.125"	32.125"	34.125"	34.125"
L	35.310"	35.310"	37.310"	35.310"	37.310"	37.310"
M	24.730"	25.820"	25.820"	28.470"	28.470"	28.470"
N	3.620"	3.620"	3.620"	3.620"	3.620"	3.620"
P	4.910"	4.910"	4.910"	4.910"	4.910"	4.910"
Q	-	-	-	-	-	8.380"
R	-	-	-	-	-	1.250"
Cap.	1,000 lb	1,000 lb	1,000 lb	1,000 lb	1,000 lb	800 lb

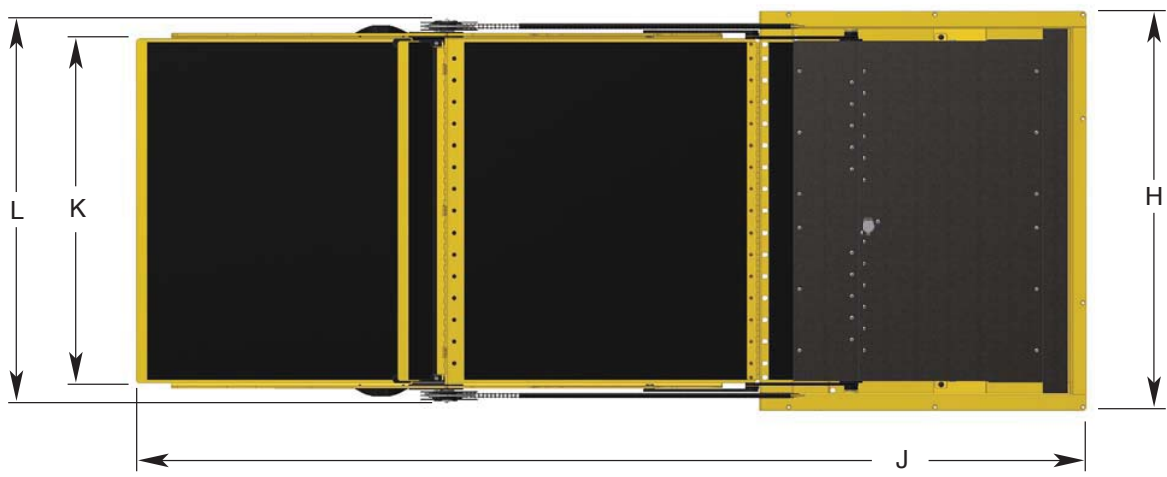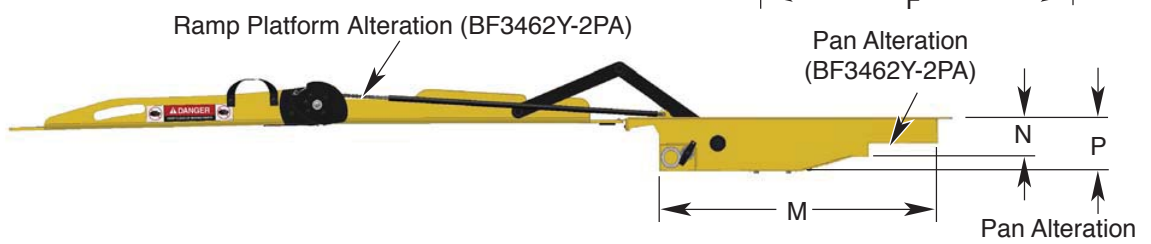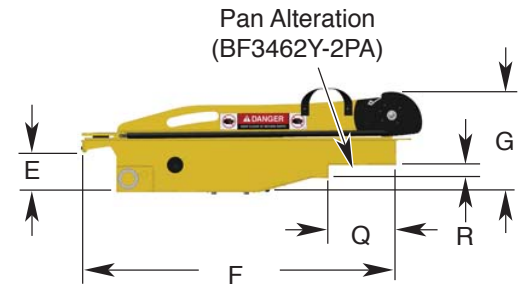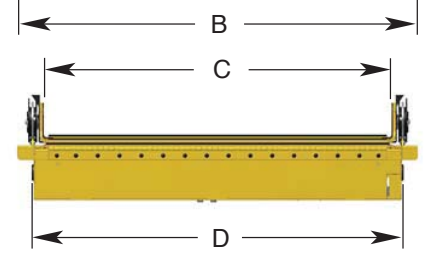

631 West 11th Street • Winamac, IN 46996  
 (574) 946-6153 • 1-800-THE-LIFT  
[www.braunability.com/commercial](http://www.braunability.com/commercial)